


CAT.5e UTP Patch Cable

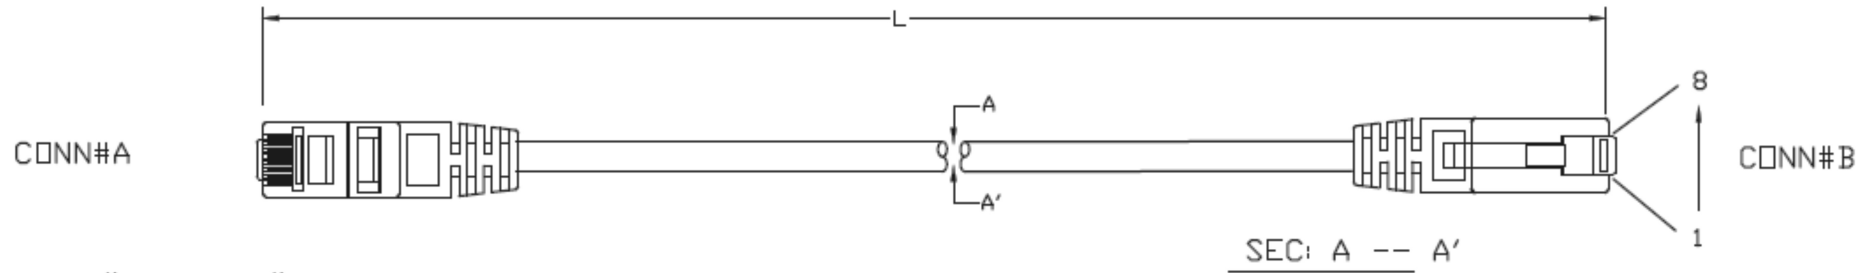

CONN#A&CONN#B

1. U.S PLUG 8P8C, *2PCS
2. Molding SR: PVC 45P Color: Light Grey, Blue, Green, Red, Yellow

PACKING

1. 1PC/PE Bag

CABLE(TYPE CM)


1. Conductor: 24AWG 0.20±0.04mm/7 Stranded Bare Copper *4Pairs
2. Insulation: ID: 0.92±0.05mm. Color: White-Green, Green; White-Orange, Orange; White-Blue, Blue; White-Brown, Brown
3. Jacket: (PVC), OD: 5.1±0.3mm Color: Light Grey, Blue, Green, Red, Yellow

Electrical

1. According to UL 1863
2. Current Rating: 1.5 Amp Max.
3. Voltage Rating: 150 Volts
4. Contact Resistance: 20m-ohm
5. Insulation Resistance: 500M-ohm
6. Dielectric Withstand Voltage: 1000 VAC RMS, 60HZ 1MIN

Mechanical:

1. Plug lifetime : 750 cycles.
2. Cable to Plug Tensile Force: 89N
3. Storage Temperature: -10°C to 60°C



WIRING: T568B	
CONN#A	CONN#B
1 Orange	1
2 White-Orange	2
3 Green	3
6 White-Green	6
5 Blue	5
4 White-Blue	4
7 Brown	7
8 White-Brown	8

	DSGN		ITEM NO:
	CHK		GA-622001-XM-XX
	APPR		
	Galaxy Technology Co., Ltd.		
UNIT			
m/m			
SCALE			
1:1			
DRAW NO:			